




ISO 13628-8 Class 1-4 Hand Operated Torque

The Hand Operated Torque Tool confirms to the ISO 13628-8 Fig 18 interface requirements, it is supplied with a Class 4 socket. Extra sockets can be supplied on request. The tool is intended for operation on the surface to verify the interfaces on subsea equipment and to operate valves without the need for an ROV and a hydraulic supply.

The tool has a built in gearbox to supply torques up to 2700Nm by hand. The tool is supplied with a torque wrench so torques can be accurately applied.

The tool is not recommended for use subsea, but can be used on a temporary basis if suitably packed with grease and cleaned when returned to the surface.

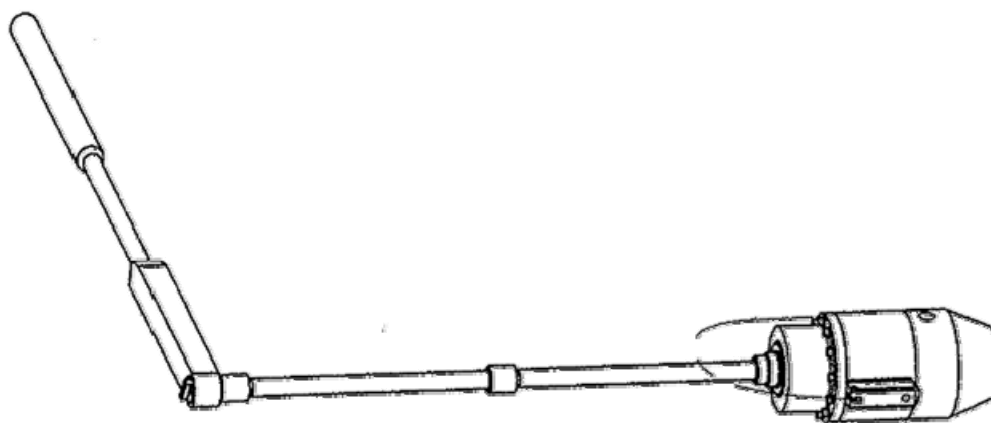

Specifications

Torque Range	30-2700 Nm
Standard Interface	ISO 13628-8:2001 (E) Fig 18 & Fig 13
Socket Size	38.1mm Sq, Class 4
Gearbox Ratio	5:1
Materials	Steel Motor and Gearbox Duplex Socket Aluminium Housing, Acetal Nose

Data Sheet: A001-350-012 issue 3

What's in the box

A292-107-001

- Gearbox, Interface & Socket Assembly
- 2 off ¾" drive 400mm long extensions
- ¾" drive torque wrench



The specification details are illustrative for marketing purposes only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement.