



Class 1-4 (API 17D) Torque Verification Unit.

This unit is used to give pre-dive surface confirmation of the torque tool calibration. It consists of a standard ISO class 1-4 torque reaction bucket with sturdy base and built in torque sensor. The unit comes complete with USB cable to connect to the PSS Torque Tool Control System for Auto Calibration.

Features

- ISO 13628-8 Fig 18 (API 17D); Class 1-4
- 2700Nm (2000ft lbs) Range
- Hand Held Digital Read Out
- Includes easily Interchangeable Shafts to suit full range
- Output to Torque Tool Control System to allow AutoCalibration



Specifications.

Interface:	ISO 13628-8 fig 18 Class 1-4
Maximum Torque:	2700Nm (2000ft lbs)
Handheld Unit	Battery Powered
Materials:	Steel Shaft, Aluminium Housing
Weight:	16kg in air


What's in the box.

A019-958-152_02


- Torque Tool Bucket inc sensor
- Class 1 & 2 Adaptor (11/16" Sq)
- Class 3 Adaptor (1-1/8" Sq)
- Class 4 Adaptor (1-1/2" Sq)
- Handheld Display
- Bucket to Display Cable
- Display to PC Cable

Optional Extras.

A019-958-174 High Torque Tool Adaptor for Verification Unit
(Includes adaptor and 35mm AF Square Shaft)

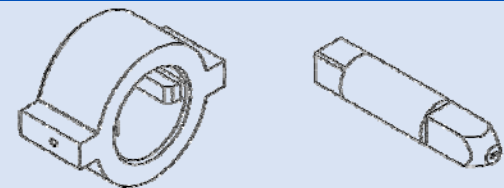

A019-958-175 Petrobras Torque Tool Adaptor for Verification Unit
(Includes adaptor and 1-3/8"mm AF Hex Shaft)

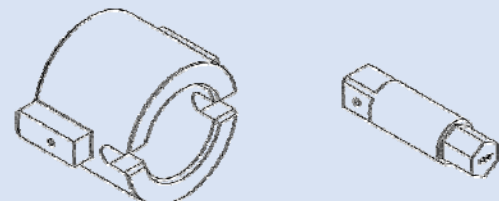

Data Sheet: A001-350-014 issue 10

The specification details are illustrative for marketing purposes only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement.