




# Mini Hydraulic Hot Stab

The mini hydraulic hot stab is a scaled down version of the ISO 13628-8 type a hot stab. It is ideal for situations where low weight and small size are required such as seal test ports on pipeline connectors.

The exit port on the female is on the main axis allowing receptacles to be mounted in tightly spaced groups.

## Features

- 3000 psi (207 bar)
- Pressure Balanced
- Non ISO/API Standard

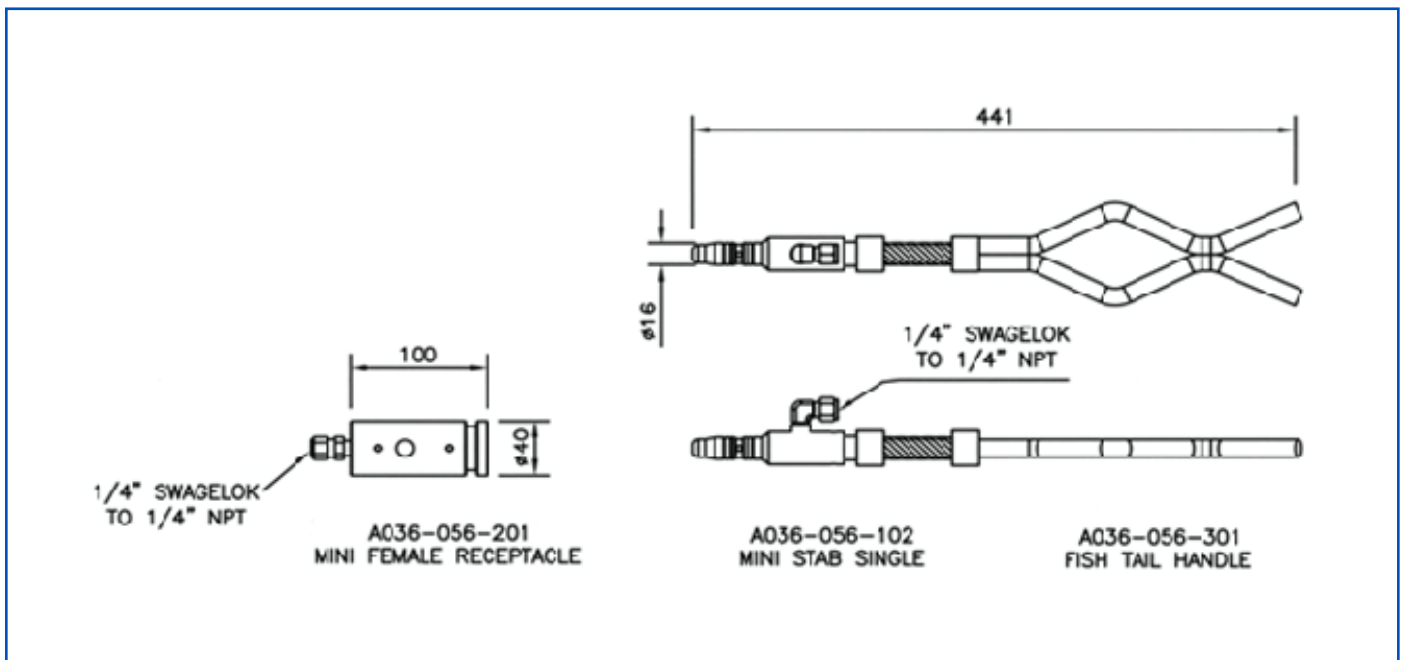

| Specifications                   |  | Options  |
|----------------------------------|--|--|
| Standard Working Pressure:       | 207 bar (3000 psi)                         | <ul style="list-style-type: none"> <li>■ Alternative handles-any style to suit customer requirement</li> <li>■ Alternative body materials</li> <li>■ Matching dummy stabs available</li> </ul> |
| Fluid:                           | Most hydraulic fluids and gases to 207 bar |  |
| Weight:                          | 0.9 kg (male stab with handle)             |  |
| Port Sizes:                      | All ports ¼" NPT                           |  |
| Flow Path:                       | Nominal path 4mm diameter throughout       |  |
| Materials:                       | Stainless steel 316L and Hiduron 130       |  |
| Data Sheet: A001-350-067 issue 5 |  |  |

The specification details are illustrative for marketing purposes only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement.