




Class 5 (API 17D) Torque Verification Unit.

This unit is used to give pre-dive surface confirmation of the torque tool calibration. It consists of a standard ISO class 5 torque reaction bucket with sturdy base and built in torque sensor. The unit comes complete with USB cable to connect to the PSS Torque Tool Control System for Auto Calibration.

Features

- ISO 13628-8 Fig 18 (API 17D); Class 5
- 6750Nm (5000ft lbs) Range
- Hand Held Digital Read Out
- USB output to Torque Tool Control System

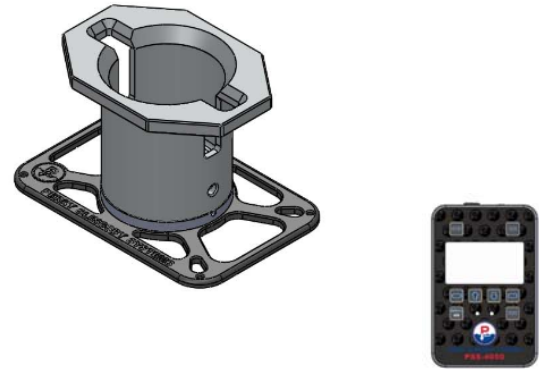

Specifications.

Interface:	ISO 13628-8 fig 18 Class 5
Maximum Torque:	6750Nm (5000ft lbs)
Handheld Unit	Battery Powered
Materials:	Steel Shaft, Aluminium Housing

What's in the box.

- TX00111-100-00**
- Torque Tool Bucket inc sensor
 - Handheld Display
 - Bucket to Display Cable
 - Display to USB Cable
 - Handheld Display Charger.
 - Power Adaptors for display charger.

Optional Extras.

Non available at present.

Data Sheet: A001-350-117 issue 2

The specification details are illustrative for marketing purposes only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement.