


3 Stage IHPU

3 Stage IHPU

The 3 Stage IHPU can be used for numerous Subsea applications including pressure testing, BOP operation, fluid transfer and hot stab operations with the capability for 3 selectable pressures each ranging from 0–5000psi. Designed to be easily and simply reconfigured, with the minimum of hassle.

Connection can be made to any sized fluid reservoir and operate using Water/ Glycol and Hydraulic mineral oils as suitable fluid media. The inbuilt depressurisation facility allows safe venting of pressure and pumping fluids back to reservoir avoiding any unwanted leakage to the subsea environment.

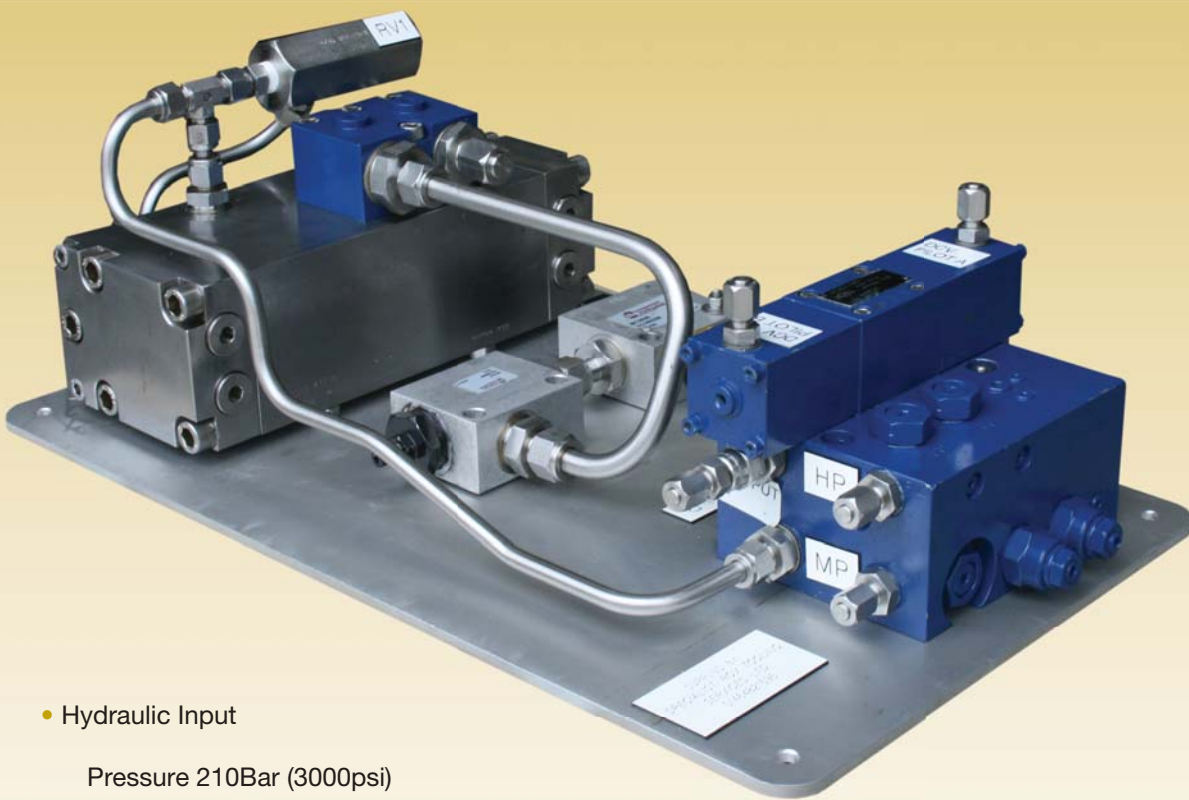

- Hydraulic Input
 - Pressure 210Bar (3000psi)
 - Flow 35-60 Lmin
- Hydraulic Output
 - Pressure 350Bar (5000psi)
 - Flow 30Lmin Output
- 3 Selectable Pressures
- Directional Control
- Supplied with all Hoses
- Suitable for:
 - Seawater
 - Glycol
 - Mineral Oils
- Supplied on ROV Friendly Plate

Available
for Rent