


Multifluid Intensifier

Pumping & Injection Systems.

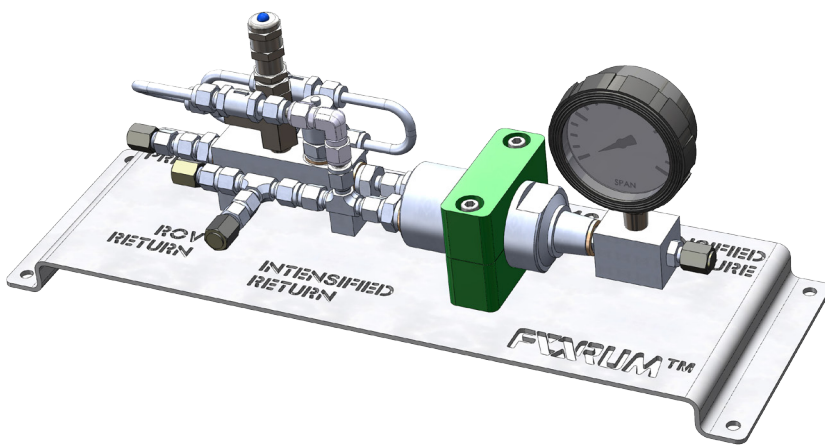

DESCRIPTION

The Forum Multi-fluid Intensifier provides a multipurpose high pressure intensifier circuit suitable for directly mounting onto a subsea skid or direct to an ROV.

Designed primarily for use with Shell Tellus 22 or 32 grade hydraulic oils, this intensifier can operate using hydraulic oil, glycol or a water/glycol mixture. The Intensifier should be completely flushed when reverting to hydraulic oils.

FEATURES

- Genuine Minibooster intensifier
- 4:1 Standard Ratio
- 690 bar (10,000psi) max output

Multifluid Intensifier

Pumping & Injection Systems.

SPECIFICATIONS

| | |
|---------------------|--|
| Max Input Pressure | 210Bar (3,000psi) |
| Max Input Flow | 14LPM (3GPM) |
| Max Output Pressure | 690 Bar (10,000PSI) |
| Max Output Flow | 2LPM (0.4GPM) |
| Fluids | Water / Glycol Hydraulic / Mineral Oils |
| Dimensions | 470 x 150 x 168 |
| Weight in air | 5.2kg |

PART NUMBERS & OPTIONS

| | |
|-----------------|-------------------------|
| SRTS-016-001/01 | Multi-Fluid intensifier |
|-----------------|-------------------------|

WHAT'S IN THE BOX

Multi-fluid intensifier
Operational hoses
Operation & Maintenance Manual