


## Trencher

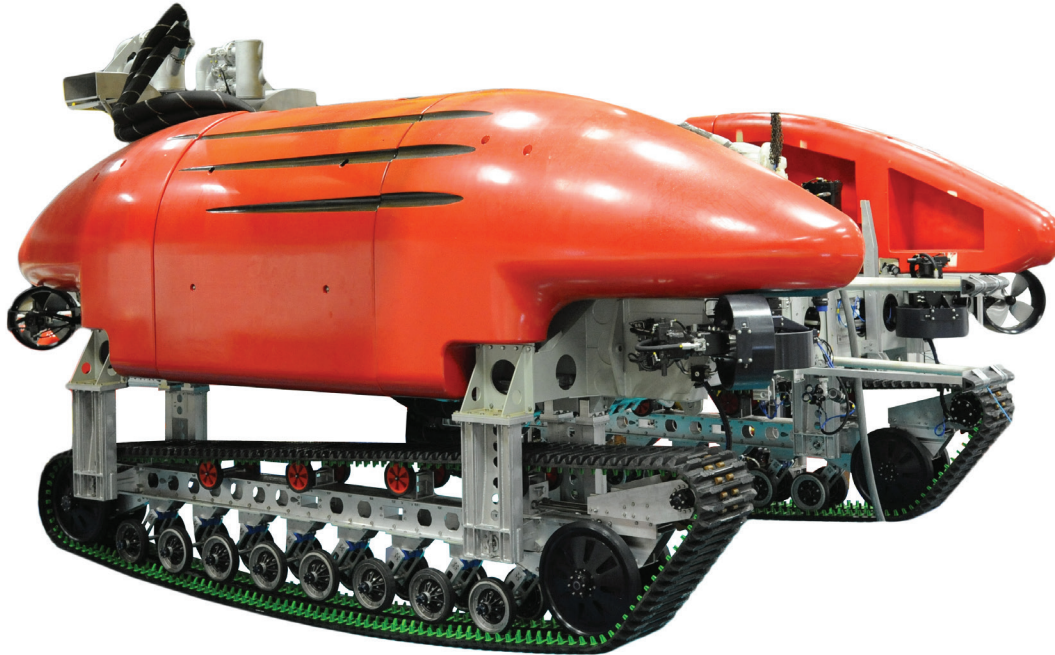

### **Perry® XT1200 Trencher – Cable Burial ROV**

Depth Rating	3000 msw
Power	1200 HP
Control System	ICE Real Time Control System with GB Telemetry & Graphical Diagnostics
HP & LP Pressure & Flow Jetting System	Variable
Burial Capacity	Up to 3.0 m Burial
Maximum Opening Between Tool Swords	1220 mm
Length (excluding tools)	9010 mm
Width (including tracks)	6100 mm
Height (tracks down)	3910 mm
Vehicle Air Weight	32000 kg
Vehicle Water Weight	300 kg – 2000 kg (Skid / Track Mode)

# Perry® XT1200

## Trencher

### Basics

Length:	9010 mm
Width over buoyancy:	6010 mm
Width over tracks:	5600 mm
Height:	3900 mm
Depth Rating:	3000 m
Weight in Air (Tracks):	32000 Kg
Weight in Air (Skids):	29000 kg
Weight in Water (Tracks):	3000 kg Max
Weight in Water (Skids):	300 kg Nominal
Thrusters Horizontal:	4 x 500 mm Ø
Thrusters Vertical:	4 x 500 mm Ø

### Maximum Speed (Free Flying)

Forward:	2.5 knots
Lateral:	2.0 knots

### Maximum Speed (Tracked)

Forward:	2500 m/hr
----------	-----------

### Track System

Underwater Tracks:	Hydraulic Driven (2)
Minimum Soil Strength:	>3.5 kPa Shear

### Auto Functions

Auto Heading Control:	Automatic to $\pm 2.0^\circ$
Auto Tracking Control:	Automatics to $\pm 2.0^\circ$
Depth Control:	Automatic to $\pm 150$ mm
Altitude Control:	Automatic to $\pm 150$ mm

### Trenching

Product Size:	150 – 915 mm Ø
Sword Separation:	410 – 1220 mm Ø

### Jetting Tools

Cable Burial Tool:	1 m, 2 m & 3 m
Depressor:	1 m, 2 m & 3 m

### Water System

LP (x2) or HP (x2) water pumps driven by variable hydraulic motors	
Total HP Output:	10,000 Lpm @ 20 bar max pressure
	24,000 Lpm @ 6 bar
Total LP Output:	17,000 Lpm @ 6 bar max pressure
	70,000 Lpm @ 1 bar max flow

### Hydraulic System

Thruster Manifold	2 x 12 Station Prop NG3
General Function Manifolds	4 x 12 Station Prop NG3

### Camera & Lighting System

- Low Light Camera (x1)
- Colour Cameras with Focus and Zoom (x3)
- Monochrome Inspection Cameras (x3)
- LED Lights, 2 per dimming circuit standard (x16)
- 4 off Hydraulic Pan & Tilt Units

The specification details are illustrative for marketing purposes only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement.

SU1035.08.20

### Equipment Fit

- Gyro / Fluxgate Compass
- Pitch / Roll Sensor
- Digiquartz Depth Sensor
- Sonar (Dual Frequency)
- Altitude Sensor
- Product Location / Tracking System (TSS 440/350)
- Responders (Provision for 2 off)
- Manipulators (2 off TA40 Rate)
- Optional Emergency RDF Beacon
- Optional Emergency Strobe Flasher
- Optional Profiler Dual Frequency
- Optional DVL (Auto Positioning)

### Sensors

- Hydraulic Pressures and Temperatures
- LP & HP Water Pressure
- Water Detection and Insulation Monitoring
- Compensation Levels
- Track Speed and Pressure
- Burial Tool Angles, Width and Forward Loads
- (Optional) Depressor Angles, Load and Cable Present

### Electrical Power System

Variable Speed Drive (VSD) capable of driving two 281kW / 375 HP Motors, Used to drive the HP water pumps. Power system capable of driving one 281kW / 375 HP motor used for the LP water pumps and hydraulic system.

### Control Systems

- Utilizes the evolutionary ICE Integrated Control Engine
- Fully redundant Windows based HMI Computers
- Dedicated real-time controllers
- Intuitive Graphic User Interface (GUI)
- Advanced graphical interactive diagnostics
- User compatible GUI
- Ergonomic pilot / co-pilot control consoles & touch screen control interfaces
- 4 x 40" HD Plasma video wall

### Data Transmission

- Single mode fibre optic video and data multiplexer
- Real-time video channels available (8)
- Full Duplex RS232 @ 115 kbps data channels (4)
- Full / half Duplex R485 / 422 / 232 channels (4)

### Additional Tool Equipment

- Cable Cutter
- Cable Gripper
- Dredge Pump

### Launch & Recovery System

Capability	Sea State 6
Capacity	3300 m
Outreach	3.8 m
Lifting Speed	30 m / min on bottom layer

### FORUM SUBSEA TECHNOLOGIES

Aberdeen: +44 (0) 1224 798660  
Houston: +1 713 351 7900  
Singapore: +65 6465 4850  
Brazil: +55 21 2112 4752  
Kirkbymoorside, York +44 (0) 1751 431751

