


# HCV100 Hydraulic Cable Cutter

## Cutters & Grinders.

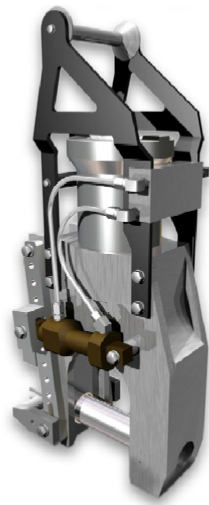

### DESCRIPTION

The Cable Cutter is designed to sever subsea umbilicals including armouring, up to 100mm in diameter. The cable is trapped by an anvil rod and then cut by a blade. The anvil and blade are driven hydraulically in both directions.

The cable cutter is fitted with a hydraulic connection to the host ROV for operation. An optional 'Emergency' disconnect mechanism can be supplied which will release it from the host ROV in case there is a loss of power.

### FEATURES

Cuts Cables up to Ø100mm

Industry Standard Tool

Lightweight

ROV Deployed

Supplied in offshore suitable transit case.

# HCV100 Hydraulic Cable Cutter

## Cutters & Grinders.

### SPECIFICATIONS

Cable Diameter:	100mm Max
Cable Type:	Armoured or lightweight
Max Hydraulic Pressure:	640 Bar-Main Cut (Requires Pressure Intensifier)
Hydraulic Fluid:	Mineral Oil
Weight In Air/Water:	30kg/23kg

### WHAT'S IN THE BOX

- TA019-00-001
- HCV100 Cutter
- ROV Handle
- Operations & Maintenance Manual.
  
- DWG-66521-001
- HCV100 Cutter
- ROV Handle
- Intensifier
- QD System

### PART NUMBERS & OPTIONS

TA019-00-001	Basic Cutter with Handle
DWG-66521-001	Cutter with handle, intensifier, QD system.
TA019-00-001/SK	Seal Kit
TA019-01-705010	Spare Blade
TA019-01-CC6378	Spare Anvil

