


75mm (3") Wire Rope Cutter

Cutters & Grinders.

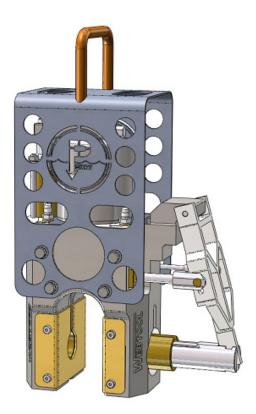

DESCRIPTION

The 75mm Wire rope cutter RCV75HD is suitable for cutting grades up to 1960N/ mm2 and up to 75mm in diameter. Utilising a fully retractable anvil the cutter can be placed over continuous lengths of wire ropes for simplified cutting operations. The cutting cylinder is supplied complete with pressure intensifier from Webtool. This tool is suitable for local or remote operations in sub-sea environments (i.e. on an ROV) and due to its high quality construction requires little or no maintenance throughout its operational life. Replacing the anvil or cutting blade is a simple task and spares kits comprising both components and all seals are available at any time. All spares provided are genuine Webtool components. The tool is supplied with ROV handle and separate cutter/anvil connection hoses.

FEATURES

- Cuts up to 75mm 1960N/mm2 Wire
- Supplied with ROV handle

Hydraulic Retract

Supplied in offshore suitable transit case.

everything remotely possible[™]



75mm (3") Wire Rope Cutter

Cutters & Grinders.

SPECIFICATIONS

Max Operating Pressure Max Wire Diameter Max wire strength


210Bar (3,000PSI) 75mm 1960N/mm2

WHAT'S IN THE BOX

RCV75HD Cutter ROV Handle Supply and return hoses. Operations & Maintenance Manual.

PART NUMBERS & OPTIONS

A036-026-150 A036-026-150/SK 75mm (3") Wire Rope Cutter Basic Spares Kit



www.f-e-t.com/subseatooling

Datasheet #A001-350-138 issue 2

The specification details are illustrative for marketing purposes only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement.